# 2012 Sundance Spas Select Victoria

### Specifications

Dimensions:	88" x 88" x 36" (223.5 cm x 223.5 cm x 91.5 cm)
Seating Capacity:	5 Adults
Dry Weight:	935 lbs (425 kg)
Filled Weight (Average Fill):	
Water Capacity (Average Fill):	
	Select Series Solid-State Electronic Controls with
Controls	LED Readout Programmable Water Temperature,
	Filtration, and Heat Cycles
Water Delivery:	2 TheraMax High-Flow Pump and 8-Hour Dynamic
vater benvery	Flow Circulation System
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP
rump i	Continuous, 11.0A Max., 56 Frame
B 0	Export (50 Hz): 2-Speed/2.0 HP Continuous, 8.6A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10.0A Max., 56 Frame
D.,,,,,, 0.	Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	•
Total Hydrojets:	
	2 Fluidix Nex, 7 Fluidix Reflex, 6 SMT Micro, 2 Vortex
Seat 6 Jets:	
Seat C Jets:	
	2 Accu-Pressure, 4 Fluidix Intelli-Jet
Footwell Jets (F):	
Air Controls/Massage Selectors:	
_	MICROCLEAN® Filtration System with Floating Weir, 125 ft² combined filtration
i iiter	(1 pleated and 1 spun-bound cartridge)
Water Treatment:	8-Hour Circulation Pump; Factory installed CLEAR <b>RAY™</b> Water Purification System
	Multi-Colored LED Lighting System; Eight Photocell exterior lights (standard)
	Available in Mahogany and Autumn Walnut
<u>-</u>	North America: Platinum, Sand, Sahara, Celestite, Oyster, Copper Sand, Sea Mist
Chen Colors.	Export: All North America Colors
Handrails:	
Headrests:	-
	North America (60 Hz): Low Flow 5.5 kW with Titanium Element
	Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A;
	Export (50 Hz): 230-240 VAC@20A, 30A or 40A; or Suitably Rated Circuit Breaker
	to Comply with Local Electrical Regulations. Certain Countries May Require Dual
	Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	· · · · · · · · · · · · · · · · · · ·
•	Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets,
	1 Year Stereo
	Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing
	Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years
	Jets, 1 Year Stereo
Waterfall Feature:	On/Off Flow Rate; Colored back-lighting
Special Features	Optional Factory Installed System with Standard RF Wireless Remote Control and MP3
	Plug

# 2012 Sundance Spas Select Victoria

### **Operation/New Features**



- Massage Selector (Pump 1) Adjusts
  Massage Level Between Seat A Jets
  (except 2 Fluidix Nex and 2 Vortex) and
  Seat E Jets
- Air Control Activates Seat A Jets (2 Fluidix Nex, 7 Fluidix Reflex, 6 SMT Micro, 2 Vortex)
- Waterfall Selector [Pump 1] Controls Waterfall Output
- Air Control Activates Seat B Jet
  (1 Vortex) + Seat C Jets (2 Fluidix
  Nex, 7 Fluidix ST) + Seat D Jets (2
  Fluidix Reflex) + Footwell Jets (4 AccuPressure)
- Air Control Activates Seat E Jets (4 Fluidix Intelli-Jets, 2 Accu-Pressure)
- Jets Pump 1: 4 Seat A Jets (2 Fluidix Nex and 2 Vortex) are always on when this pump is running
- Jets Pump 2: Seat B Jet + Seat C Jets + Seat D Jets + Footwell Jets are always on when this pump is running

#### 39 Total Jets





SMT Micro Jets



Fluidix Nex Jets (4)



Fluidix ST Jets



Fluidix Reflex




Fluidix Intelli-Jet



Vortex Jets (3)

Spa Operation Subject To Change Without Notice

### **NEW FOR 2012!**



New Aquatic Stereo (with integrated iPod dock)



Waterfall Valve




Dimensions/Specifications Subject To Change Without Notice

## 2012 Sundance Spas Select Victoria

#### **Portable Dimensions**

#### **TOP VIEW**

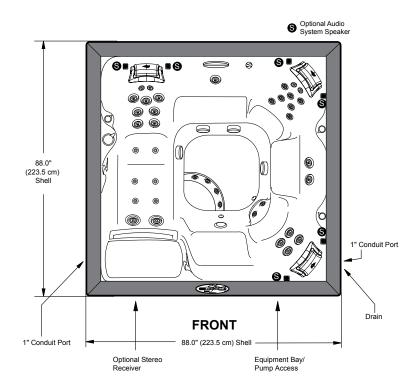




IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



## FRONT/BACK SIDE VIEW (Front view of stereo option shown)

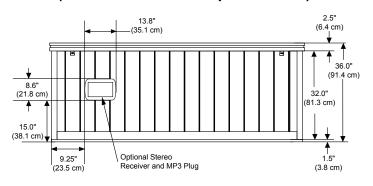

#### RIGHT SIDE VIEW

